

15 inch Fanless Full Flat Touch Screen POS System

TP-2515



- **Features**

- Intel® Celeron® Bay Trail-D J1900 Processor
- Fanless Cooling System
- Modular Peripherals for Easy Installation
- Easy-Replacement Storage Drive Slot
- Water Spill Proof Front Bezel
- Slim, Sealed, and Durable Housing
- Easy Maintenance and Stylish Design



Side View




Front View




Rear View




- Dimensions**

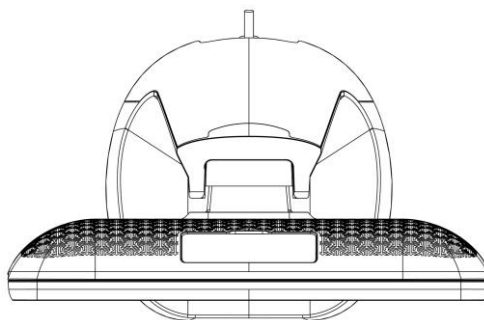


Top View

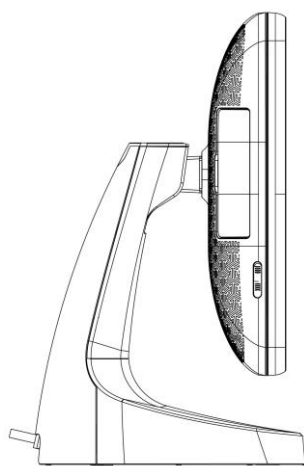


Left View

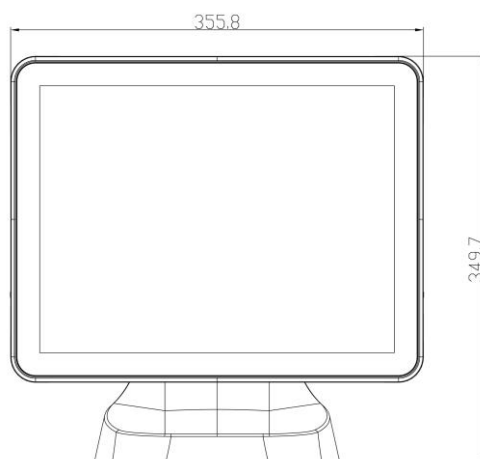


Front View

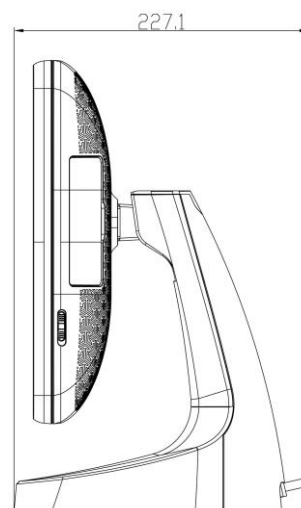

Right View

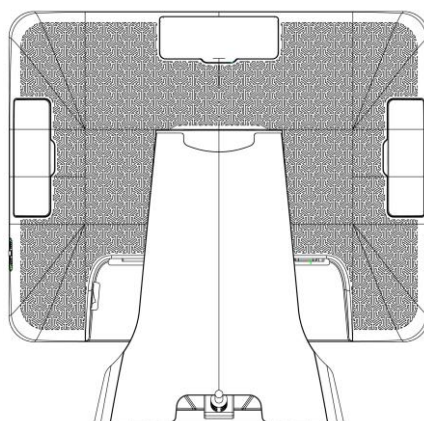

Rear View

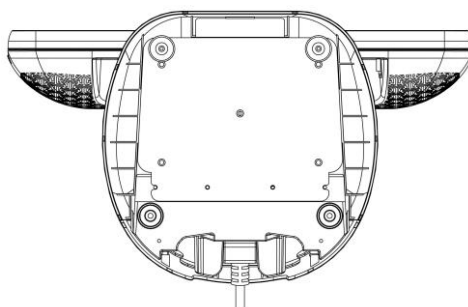

Bottom View



• Specifications

Model		TP-2515
CPU		Intel® Bay Trail-D Platform, Celeron® Processor J1900 2.0 GHz (2M Cache, up to 2.42 GHz)
System Memory		1 x DDR3L SO-DIMM Socket, up to 8GB
Graphic		Intel® HD Graphics
OS Support		POS Ready 7, Windows 7, Windows 8.1, Windows 10 IOT Entry, Linux
Display		
Screen Size		15" TFT LCD LED Backlight, (Ratio 4:3)
Resolution		1024 x 768
Touch Screen		Ture-Flat Projective Capacitive Touch (10 point) Ture-Flat 5-wire Resistive Touch
Tilting Angle		15~85 degree
Storage		
HDD		1 x 2.5" SATA II Bay HDD / SSD or m-SATA
Interface		
Serial		4x COM (DB9 with RI/+5VDC/+12VDC output by BIOS)
Parallel		1 x DB25 Parallel Port (optional)
USB		4 x USB type A (3 x USB 2.0 and 1 x USB 3.0)
LAN		1 x RJ-45, Giga LAN Support (10/100/1000 Mbps)
VGA		1 x DB-15, Female (Max Resolution: 1920 x 1080)
Cash Drawer		1 x RJ-11, +12VDC/+24VDC by jumper select
DC Out		1 x +12VDC
DC In		1 x +12VDC
Others		
Power Adapter		+12V/5A, 60W External Power Adaptor with Cable Head Lock, hide in stand (Power Adaptor: 100VAC~240VAC, 50/60Hz)
Color		Black / White
Compliance	EMI & Safety	CE EN55032/EN55024 FCC PART 15B LVD EN60950-1 BSMI CNS14336 CB IEC60950-1
Weight		7.1 kg
Dimension (mm)		355.8 (W) x 349.7 (H) x 227.1 (D) mm
Operating Temperature		0°C~40°C
Operating Humidity		20% ~ 80% RH non-condensing
Storage Temperature		-20°C~55°C
Storage Humidity		20% ~ 85% RH non-condensing

* The specifications are subjected to change without prior notice.



Peripherals

Optional Peripheral		
2nd LCD Display		9.7", 350nits and resolution up to 1024 x 768 15", 300nits and resolution up to 1024 x 768 Optional PCAP Touch supported
Modular Customer Display		VFD, 20 Columns x 2 Lines
MSR		Bi-directional, comply with ISO 7811 and Track 1/2/3 (HID USB)
Barcode Scanner		2D Barcode Scanner
3-1 Reader I	MSR	Bi-directional, comply with ISO 7811 and Track 1/2/3 (HID USB)
	Chip card reader	Read/write ISO7816 /EMV specification and synchronous memory cards (HID USB)
	NFC	Read/Write NXP, Mifare Plus, Mifare DESFire and ISO14443AB-4 contactless cards (HID USB)
3-1 Reader II	MSR	Bi-directional, comply with ISO 7811 and Track 1/2/3 (HID USB)
	Chip card reader	Read/write ISO7816 /EMV specification and synchronous memory cards (HID USB)
	Optical Finger Print	Pixel resolution 512 dpi (HID USB)
i-Button		Dallas i-button Reader (HID USB)
Barcode Scanner		1D and 2D Barcode Scanner
Wi-Fi		MiniPCle interface, IEEE 802.11 a/b/g/n/ac

* The specifications are subjected to change without prior notice.



2D Barcode Scanner



Customer Display



2nd LCD Display

